


# ALIMENTACIÓN DE EMERGENCIA

## Fuente de alimentación de emergencia



### PS-630E

El gestor PS-630E permite la alimentación de emergencia permanente según EN 54-4 en caso de fallo de alimentación. La unidad de 19" (2U) está equipada con 6 salidas con fusibles que se pueden utilizar con una carga de hasta 30 A. La supervisión inteligente del estado de la batería garantiza una alimentación ininterrumpida de 24 V DC y la recarga de la batería inmediatamente después de la restauración de la red eléctrica. Debido a la tecnología "hot swap", el cambio de las baterías se puede realizar sin interrupción del servicio.

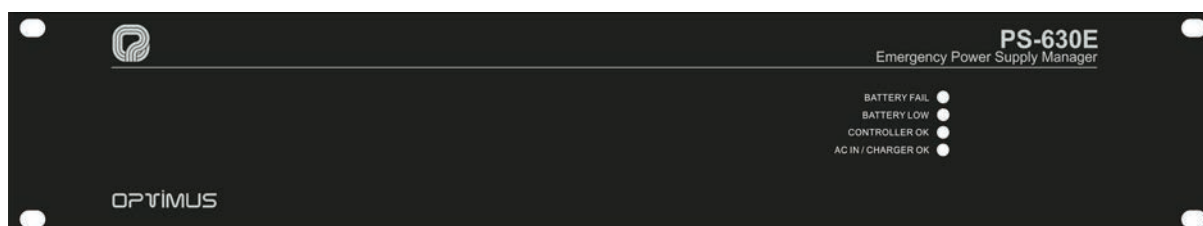

Tensión de entrada	230 V AC 50-60 Hz
Tensión de salida	24 V DC
Salidas	6
Corriente de salida	max 30 A x salida
Fusible	max 40 A x salida
Consumo	250 W
Capacidad de la batería	32 ~ 150 Ah
Dimensiones (mm)	483 (ancho) x 88 (alto) x 277 (fondo)
Peso	6,20 kg

Baterías, juego de cables de batería y fusible de batería no incluidos


# EMERGENCY POWER SUPPLY

## Emergency power supply manager



### PS-630E

The emergency power supply manager allows the permanent emergency power supply in accordance with EN 54-4, in the event of a power failure. The 19" unit (2U) is equipped with 6 fused outputs that can be used with up to 30 A load. The smart battery condition monitoring ensures an uninterrupted 24 V DC power supply and the recharging of the battery immediately after the restoration of the mains supply. Due to the "hot swap" technology the exchange of the batteries can be done without service interruption.

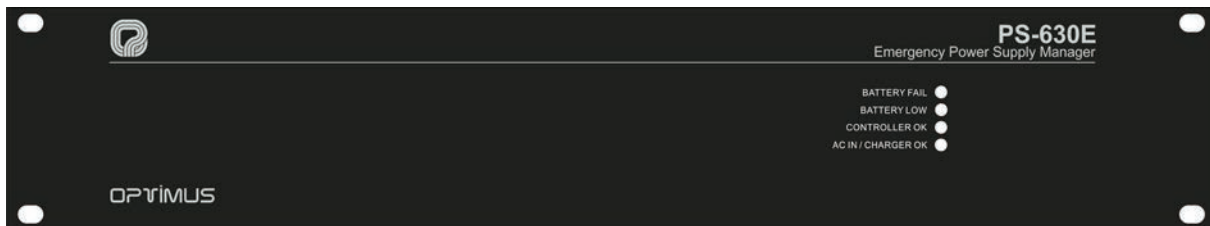

Input Voltage	230 V AC 50-60 Hz
Output Voltage	24 V DC
Consumer Output	6
Load current consumer output	max 30 A
Fuse consumer output	max 40 A
Power Consumption	250 W
Battery Capacity	32-150 Ah
Dimensions	483 (width) x 88 (height) x 277 (depth)
Weight	6.20 kg

Batteries, battery cable set and battery fuse not included