


ALTAVOCES

Caja acústica de alta potencia

BS-208T 100 W 100 V negro - **BS-208WT** 100 W 100 V blanco

Caja acústica construida con madera contrachapada de abedul, con crossover pasivo, transductor de alta calidad de 8" y driver Kapton de 1" de alta sensibilidad y mínima distorsión que consigue una claridad elevada sin asperezas en alta frecuencia. Conectores Euroblock y NL4 dobles (entrada y enlace) para mayor facilidad de conexión. Soporte tipo U incluido. Disponible en versión de 170 W / 8 ohm (ref. BS-208 y BS-208W).

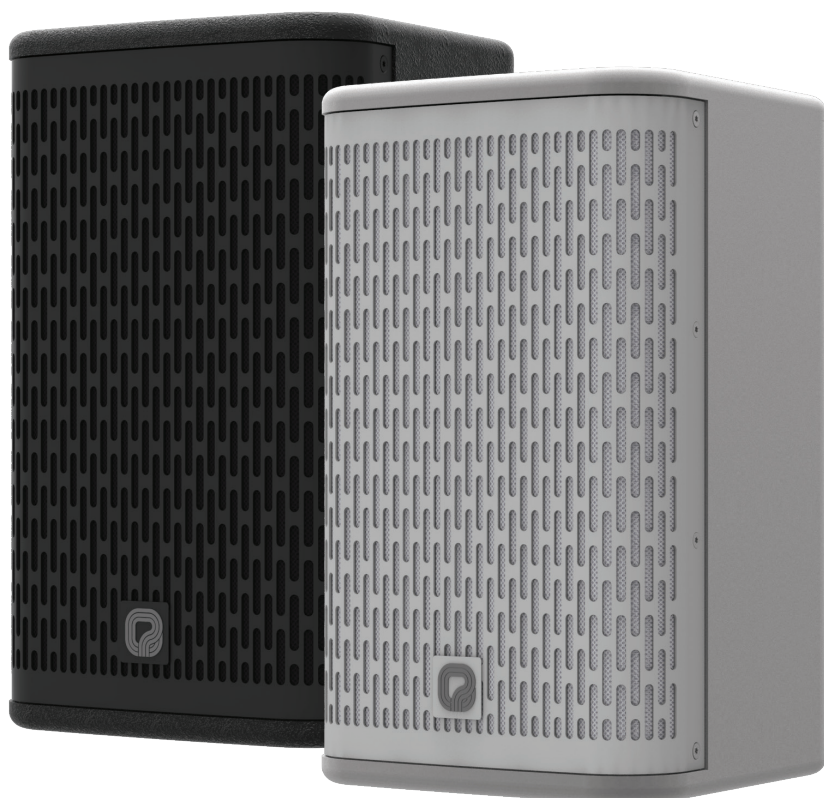


Otras opciones de montaje




SG-BS208
SG-BS208W

Soporte giratorio, disponible en blanco o negro



C2-BS208
C4-BS208


Pletinas para montaje en cluster de 2 ó 4 altavoces.

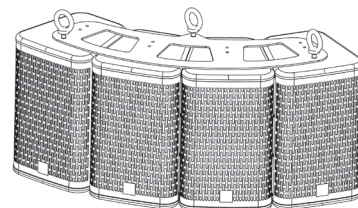

Especificaciones técnicas

Tipo	caja acústica de dos vías
Recinto	trapezoidal bass reflex
Potencia	100 W RMS
Conexión	línea de 100 V
Transductores	8" woofer + 1" tweeter Kapton driver
Dispersión	60° (H) x 40° (V)
Frecuencia de cruce	2.200 Hz
Conectores	2x NL4MP speakon + Euroblock
Acabado	chapa de abedul 12 mm + rejilla metálica, negro
Color	negro (BS-208T) o blanco (BS-208WT)
Soporte	tipo U (incluido) o tipo giratorio (opcional)
Dimensiones (mm)	245 (ancho) x 255 (fondo) x 395 (alto)
Peso	8,5 kg

Dimensiones

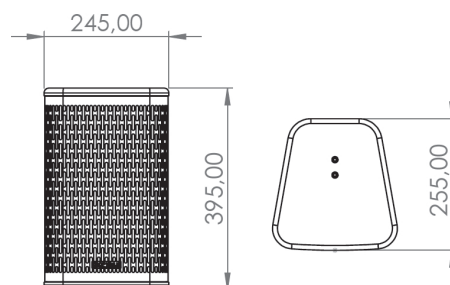

LOUDSPEAKERS

High power two-way speaker

BS-208T 100 W 100 V black - **BS-208WT** 100 W 100 V white


2-way speaker made of birch plywood, with a passive crossover, high-quality 8" transducer and 1" Kapton driver with high sensitivity and lower distortion for outstanding detail and clarity in high frequencies without harshness. Dual Euroblock and NL4 connectors (input and link) for easy connection. U-type bracket included. Also available in 170 W / 8 ohm version (ref. BS-208 and BS-208W).




Other mounting options



SG-BS208
SG-BS208W
Swivel bracket, available in black or white




C2-BS208
C4-BS208
Platen for cluster installation of 2 or 4 loudspeakers.

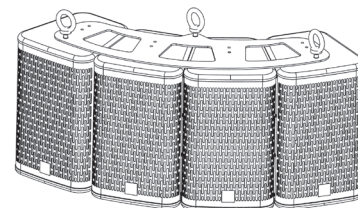

Technical specifications

Type	2-way speaker
Enclosure	trapezoidal bass reflex
Power	100 W RMS
Connection	100 V
Transducers	8" woofer + 1" tweeter Kapton driver
Dispersion	60° (H) x 40° (V)
Crossover frequency	2,200 Hz
Connectors	2x NL4MP speakon + Euroblock
Finish	birch plywood 12 mm + metallic grille
Colour	black (BS-208) or white (BS-208W)
Support	U type (included) or swivel bracket (option)
Dimensions (mm)	245 (width) x 255 (depth) x 385 (high)
Weight	8.5 kg

Dimensions

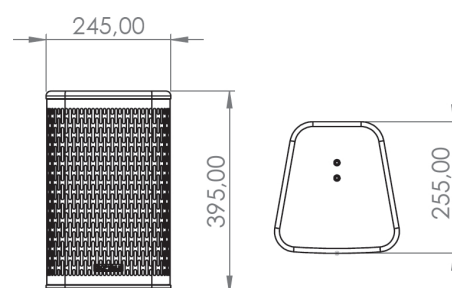

www.optimusaudio.com

BS208T_EN | 021612

C/ Barcelona 101
17003 Girona (Spain)
(+34) 972 203 300

OPTIMUS
SOUND INNOVATION