

# 4-Port USB HDMI Multi-View KVMP™ Switch


## CM1284

ATEN CM1284 4-Port USB HDMI Multi-View KVMP™ Switch improves the operational efficiency of real-time monitoring. The CM1284 allows users to manage the data more efficiently by allowing multiple sources to be selected, switched, and displayed at the same time with independent keyboard and mouse control.

Advanced video support provides a better-defined HDMI connection with video resolutions up to 4K (4096 x 2160 @ 30 Hz). The CM1284 guarantees users a real-time monitoring functionality by offering dual outputs on console side. One output provides the following display modes: Quad View, Picture in Picture (PiP), Picture by Picture (PbP), Picture on Picture (PoP), and the other one provides Full Screen mode. Featuring Boundless Switching, the CM1284 allows users to simply move the mouse cursor across windows to switch to other video sources. This makes it easier to instantly access and control the target computer.

Incorporating Daisy Chain Control (DCC) capability, users are allowed to control up to 3 additional CM1284 units via a single console. In addition, CM1284 can be cascaded up to 2 levels to reach the maximum of 16 video sources to be simultaneously selected, switched, and displayed with independent keyboard and mouse control.

Engineered to meet the ever-increasing demand for multi-view functionality, the CM1284 is specifically designed for where real-time monitoring is needed such as aviation industry, financial trading, and medical application.

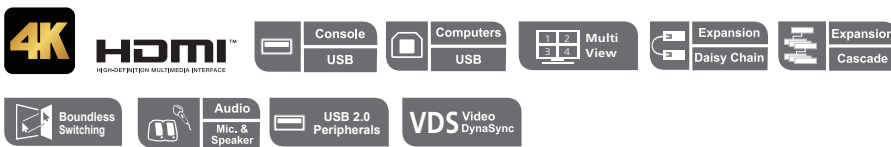

Front view



Rear view



## Features

- Multi-view console controls up to four video sources on one screen with display modes including Quad View, Picture in Picture (PiP), Picture by Picture (PbP), and Picture on Picture (PoP)
- Features dual outputs on console side – a multi-view output and a full screen output
- Easily resizes and / or reposition any PiP or PbP to suit users' viewing needs
- System configuration via front panel, OSD, IR Remote, and RS-232 commands – display mode and port selection
- Supports superior video quality – up to 4K (4096 x 2160 @ 30 Hz); YCbCr 4:2:2
- Drop down menu – to edit display windows and other functions with the mouse and on-screen control panel
- Computer selection via front panel pushbutton and hotkey, mouse, and the serial commands<sup>1</sup>
- Boundless Switching – simply move the mouse cursor across windows to switch to other video sources even among the daisy chained installation
- Boundless Switching Focus – a window frame to indicate which computer that it currently has the focus
- Supports Extended Desktops Boundless Switching<sup>2</sup>
- Video DynaSync™ – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- EDID Expert™ – selects optimum EDID settings for smooth power-up, high-quality display and use of the best video resolution across different screens
- DCC (Daisy Chain Control) – controls up to 3 additional CM1284 units from a single console
- Cascade up to 2 levels – controls up to 16 computers (with up to 4 x 4 Multi-view mode)
- HDCP 1.4 compliant
- Console keyboard emulation / bypass feature that support most multimedia keyboards
- Console mouse port emulation / bypass feature that supports most mouse drivers and multifunction mice
- Independent switching for USB peripheral port, audio function and KVM switch focus
- Power on detection
- Auto Scan feature
- Firmware upgradable via computer's USB port
- Full bass response provides a rich experience for 2.1 channel audio
- Multilingual keyboard mapping – supports English, French, Japanese, and German keyboards
- Hot-pluggable
- Supports keyboard combinations via emulation (for Sun / Mac)<sup>3</sup>

**Note:**


1. Mouse port switching is only workable under the mouse emulation mode and applicable to 3-key USB wheel mouse only.
2. This function is only supported by Multi-View KVMPTM Switch using firmware version v2.3.222 or later.
3. PC keyboard combinations emulate Mac keyboard. Mac keyboard only works with their computers.

## Highlights

<p><b>Flexible Display Modes</b></p>	<p>CM1284 supports Quad View, Picture in Picture (PiP), Picture by Picture (PbP), Picture on Picture (PoP), and Full Screen mode. User can change size and location of each video source and easily click on demand to control PC.</p>
<p><b>Boundless Switching</b></p>	<p>Boundless Switching is a patented ATEN technology. By moving the mouse cursor across different windows, users are allowed to switch KVM focus among multiple sources on multiple windows. The mouse cursor can be moved to another window in any direction and instantly access the target computer.</p>
<p><b>Expandability</b></p>	<p>Supports Daisy Chain Control (DCC) for user to control up to 3 additional CM1284 units from a single console. Also, CM1284 can be cascaded up to 2 levels to control up to 16 computers.</p>
<p><b>Video DynaSync™</b></p>	<p>ATEN's exclusive Video DynaSync™ technology automatically detects the horizontal and vertical offset values of each computer's display settings and synchronizes them with the monitor users are working on, ensuring that the display resolution will always be correct when switching among different video sources.</p>

## Display Mode

### Full Screen Mode

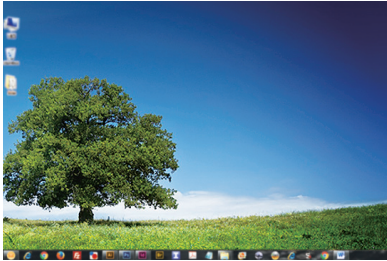

### Quad View



### Picture by Picture (PbP)

- PbP2



- PbP3



### Picture in Picture (PiP)


- Dual



- Quad




- Triple

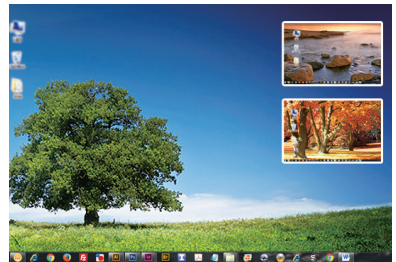

### Picture on Picture (PoP)



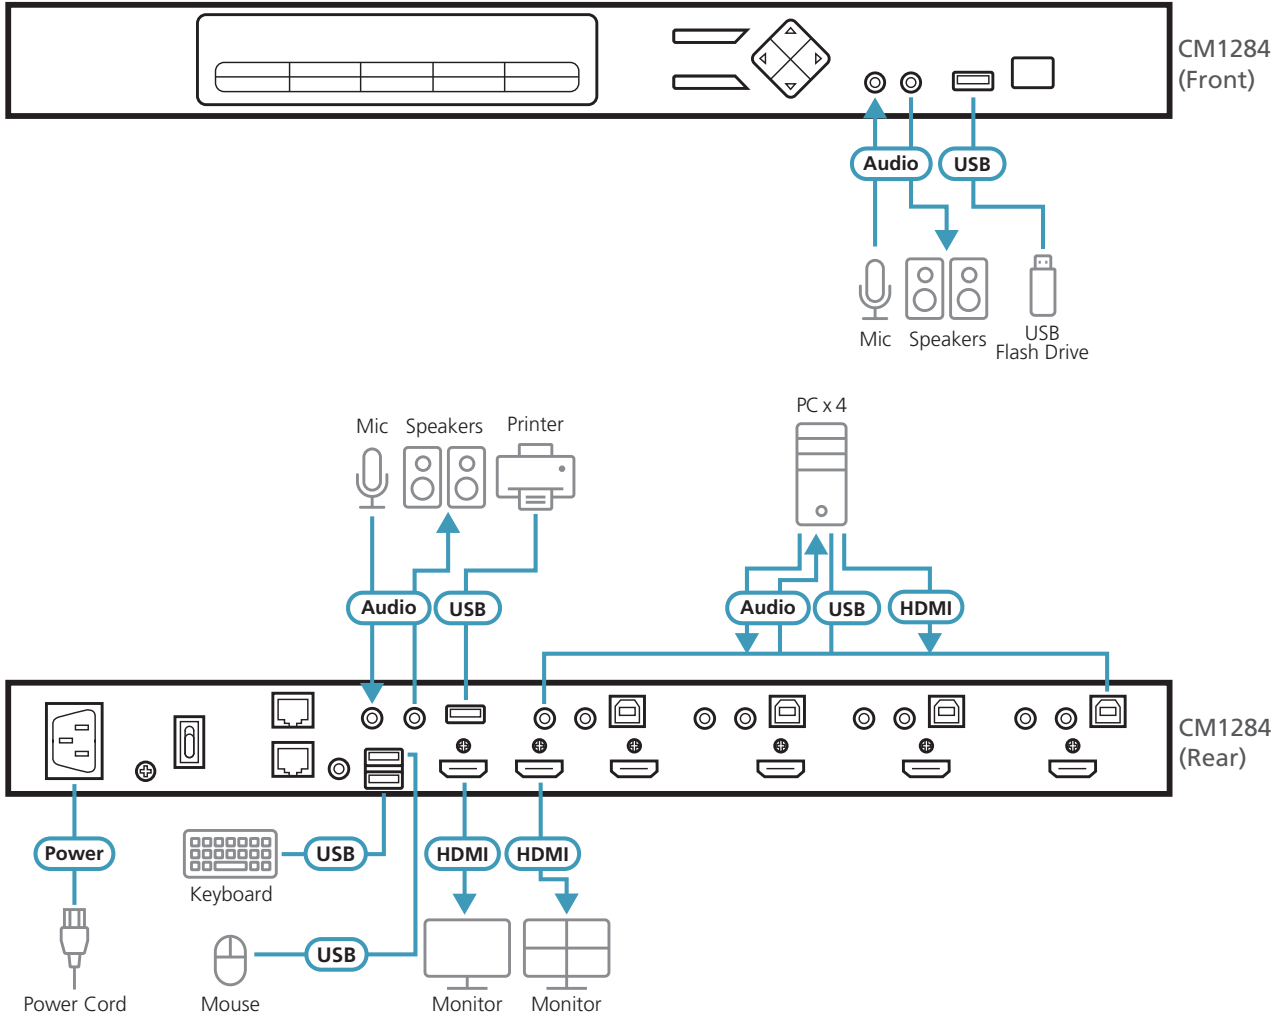

## Specifications

	CM1284
<b>Computer Connections</b>	4
<b>Port Selection</b>	Pushbuttons, Hotkeys, IR Remote Control, On-Screen Display (OSD), Mouse Wheel, Mouse Cursor, RS-232 Commands
<b>Connectors</b>	
Console Ports	2 x USB Type-A Female 2 x HDMI Female (Black) 2 x 3.5 mm Audio Jack Female (Green; 1 x front panel, 1 x rear panel) 2 x 3.5 mm Audio Jack Female (Pink; 1 x front, 1 x rear) 2 x RJ-45
KVM (Computer) Ports	4 x USB Type-B Female 4 x HDMI Female (Black) 4 x 3.5 mm Audio Jack Female (Green) 4 x 3.5 mm Audio Jack Female (Pink)
Power	1 x IEC320 Jack
USB Hub	2 x USB 2.0 Type-A Female (1 x front panel; 1 x rear panel)
<b>Switches</b>	
Selected	11 x Pushbuttons
<b>Emulation</b>	
Keyboard / Mouse	USB
<b>Video</b>	4096 x 2160 @ 30 Hz
<b>LEDs</b>	
KVM	4 (Orange)
Audio	4 (Green)
USB	4 (Green)
<b>Maximum Input Power Rating</b>	100-240 V AC; 50/60 Hz; 1 A
<b>Power Consumption</b>	AC 110 V: 16.0 W; AC 220 V: 14.8 W
<b>Environmental</b>	
Operating Temperature	0 – 40 °C
Storage Temperature	-10 – 60 °C
Humidity	0 – 80% RH, Non-condensing
<b>Physical Properties</b>	
Housing	Metal
Weight	2.46 kg
Dimensions (L x W x H)	43.72 x 16.40 x 4.40 cm

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 06/2022 V5.0

© Copyright 2022 ATEN® International Co. Ltd.  
ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their respective owners.  
The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

