

SISTEMA DE CONFERENCIAS

Unidad de control central

TL-Z4

unidad central

ZJ-KR

expansión

Unidad de control del sistema de conferencias con conexión por cable, con capacidad para el control de 60 ~ 70 unidades de conferencias, ampliable hasta un máximo de 4096. El sistema permite activar hasta 4 micrófonos de delegado al mismo tiempo.

Alimentación	100 ~ 220 V C, 50/60Hz
Pantalla	OLED (61 x 37 mm)
Sensibilidad VOX	H/M/L (76 dB / 80 dB / 82 dB)
Consumo (max)	300 W
THD	< 0,05%
Relación señal-ruido	> 96 dB(A)
Respuesta en frecuencia	20 Hz ~ 20 KHz
Rango dinámico	> 94 dB
Entrada de audio externa	0,775 V, terminal PHOENIX
Salida de audio	1 x RCA 20 dBu asimétrico
	1 x XLR 20 dBu simétrico
Salida de grabación de audio	USB, 0,8 M/m
Capacidad	60 - 70 unidades
Capacidad máxima sistema*	4096
Protocolo comunicación PC	TCP/IP
Limitación delegados	1/2/3/4
Temperatura de funcionamiento	-0 ~ 45°C
Instalación	Sobremesa o rack 19"
Dimensiones (ancho x fondo x alto)	485 mm x 350 mm x 90 mm
Peso	7,6 Kg




TL-Z4



ZJ-KR

Diagrama

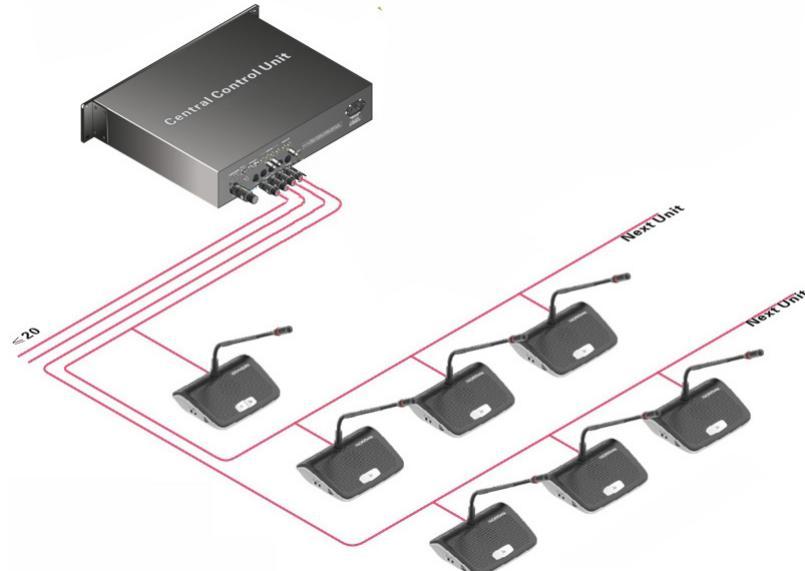

CONFERENCE SYSTEM

Central control unit

TL-Z4

central unit

ZJ-KR

expansion

Wired conference system control unit, capable of controlling 60 ~ 70 conference units, expandable up to a maximum of 4096. The system allows up to 4 delegate microphones to be activated at the same time.

Power Supply	100 ~ 220 V AC, 50/60 Hz
Display	OLED (61 x 37 mm)
VOX sensitivity	H/M/L (76 dB / 80 dB / 82 dB)
Consumption (max)	300 W
THD	< 0.05%
SNR	> 96 dB(A)
Frequency response	20 Hz ~ 20 KHz
Dynamic range	> 94 dB
External audio input	0.775 V, PHOENIX terminal
Audio output	1 x RCA 20 dBu unbalanced 1 x XLR 20 dBu balanced
Recording Audio output	USB, 0.8 M/m
Capacity	60 - 70 units
Max system capacity*	4096
PC communication methods	TCP/IP
Active delegate microphone limit	1/2/3/4
Operating temperature	-0 ~ 45° C
Installation	desktop or 19" rack mounting
Dimensions (W x D x H)	485 mm x 325 mm x 90 mm
Weight	7.6 Kg



TL-Z4



ZJ-KR

Diagram

