

ALTAVOCES

Altavoz de techo

A-252BTM **2,5"** **6 W** **94 dB**


Altavoz para empotrar en techo de 2,5" y 6 W RMS en línea de 100 V, con conexiones disponibles a 3 W y 1 W (selección mediante cables). Reja circular metálica color blanco RAL9016 y anclaje rápido mediante muelles.



Especificaciones técnicas

Altavoz	2,5"
Potencia RMS	6 W
Selección de potencia	6 W, 3 W y 1 W
Sensibilidad	87 dB SPL a 1 W, 1 m y 1 kHz
Presión acústica	94 dB SPL a 6 W, 1 m y 1 kHz
Respuesta en frecuencia	120 ~ 20.000 Hz
Orificio a empotrar	Ø 95 mm
Dimensiones (mm)	Ø 103 x 78 (fondo)
Peso	0,44 kg
Acabado	Plástico ABS, rejilla metálica
Color	Blanco, RAL 9016
Montaje	Muelles
Selección de potencia	Por cables

Dimensiones

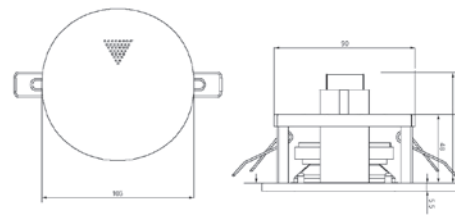

LOUDSPEAKERS

Ceiling speaker

A-252BTM **2,5"** **6 W** **94 dB**

Ceiling loudspeaker for flush mounting 2.5" and 6 W RMS in 100 V line, with connections available at 3 W and 1 W (via cable selection). Circular metallic grille, white colour RAL 9016, with quick mounting by springs.



Technical specifications

Loudspeaker	2.5"
Rated Power (RMS)	6 W
Power Taps	6 W, 3 W & 1 W
Sensitivity	87 dB SPL (1 W, 1 m, 1 kHz)
Sound Pressure	94 dB SPL (6 W, 1 m, 1 kHz)
Frequency Range	120 ~ 20,000 Hz
Cutout Size	Ø 95 mm
Dimension (mm)	Ø 103 x 78 (depth)
Weight	0.44 kg
Finish	ABS plastic, metal grille
Colour	White, RAL 9016
Mounting	Springs
Power selection	By cables

Dimensions

